

# optiMOS™

## Scientific CMOS Optimized for Microscopy

As life science research delves deeper into investigating cellular dynamics, mechanisms and electrochemical signaling, the need for resolving high speed, low light events continues to increase.

Since the inception of digital microscopy, scientific grade CCD cameras have been the gold standard for fluorescence imaging due to their sensitivity and low noise characteristics. However, many cell mechanisms occur on very short time scales and emit low luminescence signals when fluorescently labeled. To sufficiently document these cellular interactions, the imaging device used must be provide adequate temporal and spatial resolution while maintaining a good signal to noise ratio. Due to the inherent architecture of CCDs, achieving high frame rates in combination with low noise and high resolution is simply outside the realm of their intended use.

optiMOS from QImaging is the live cell replacement to CCD cameras.

Featuring faster frame rates and lower noise, optiMOS was designed as the budget friendly alternative that avoids complex data management in the PC. Capable of streaming 100fps with a 45% larger FOV and <math>2e^{-}</math> of read noise, optiMOS delivers 10x the time resolution of CCD cameras without trading off on resolution or sensitivity.

Offered as the affordable sCMOS solution, optiMOS brings the advantages of low noise and high speed imaging to a broader range of cell biology applications.

## The new sCMOS Camera and CCD alternative from QImaging



### features

#### Study high speed cell dynamics with greater temporal resolution

- 100 frames per second

#### See more, faster

- 2.1 megapixels with 6.5µm pixels
- 14.3mm diagonal

#### Eliminate the tradeoffs between speed and sensitivity

- <math>2e^{-}</math> read noise

#### High Speed Imaging without Complexity

- Proprietary High Speed Data Interface
- 420MB/s data rate

### benefits

- Capture 10x the time resolution of typical CCD cameras
- Track high speed dynamic events previously undetected including vesicle formation, protein transport, and calcium wave propagations

- Stream 100fps with a 45% larger FOV than standard 1.4MP fluorescence CCD cameras
- Capture more events in a single image – increase throughput

- <math>2e^{-}</math> of noise enables high frame rates without compromising on sensitivity
- Capture high speed details and maintain your SNR
- Preserve cell vitality with shorter exposures

- Stream 100fps to a single PCIe Solid State Drive
- Does not require complex and expensive RAID 0 configurations with multiple SSD drives

# optiMOS™ Specifications

## sCMOS sensor

Sensor Type	BAE CIS1910F Scientific CMOS
Sensor Array	1920 x 1080
Pixel Size	6.5µm x 6.5µm
Sensor Dimensions	12.48mm x 7.02mm (14.32mm diagonal)
Peak Quantum Efficiency	55% at 600nm
Single Pixel Full Well	30,000e-

## camera

Digital Output	16-bit
Readout Frequency	283MHz and 78MHz
Read Noise	1.9e- (rms); 1.5e- (median)
Frame Rate	100 fps at full resolution
Exposure Time Range	0ms - 30s
Supported Regions of Interest	User Defined
Dark Current Rate	0.5 e/p/s at 0°C
Cooling	0°C stabilized at +20°C ambient
Digital Interface	SerialLite PCIe
Triggering I/O Signals	Trigger In, Expose Out, Trigger Ready Out
Supported Triggering Modes	Internal Timed, Trigger First, Edge High, Edge All Rows
Optical Interface	1", C-mount optical format
Mounting Hole Thread Size	1/4" - 20 thread
Camera Dimensions	98mm x 125mm x 178mm
Weight	1.72kg
Computer Platforms/ Operating Systems	Windows 7 (64/32 bit) Must have available PCIe x4 slot Refer to the QImaging website for the latest list of minimum computer requirements
Power Requirement	25 watts at 9 volts

## methods and applications

### Cell Biology

Spinning Disk Confocal  
High Speed Multicolor Fluorescence  
FRAP  
Intrinsic Imaging

### Ion Transport Physiology

Electrophysiology  
Calcium Imaging  
Ratiometrics Imaging  
Voltage Sensitive Dyes

### Biophysics

Membrane Dynamics  
Protein/Lipid Trafficking  
Nanoparticle Imaging  
High Speed FRET  
TIRF



## included

### optiMOS Scientific CMOS Camera

Model: 01-OPTIMOS-R-M-16-C  
(monochrome, 16-bit)

- Power Supply
- Data Cable
- High Speed LVDS PCIe Card
- Access to SDK
- Limited Warranty

## spectral response

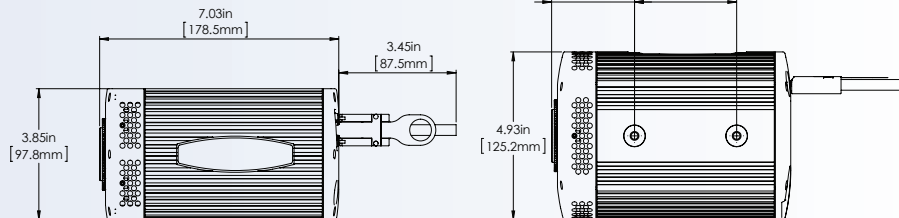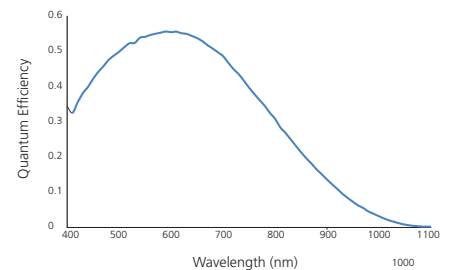

Tel 604.530.5800 ▪ Fax 604.648.8277 ▪ info@qimaging.com  
www.qimaging.com

Note: Specifications are typical and subject to change.

optiMOS and optiMOS logo are trademarks of QImaging Corporation.  
QImaging is a registered trademark of QImaging Corporation.  
Other brand and product names are the trademarks or  
registered trademarks of their respective owners and manufacturers.